

### Surface Mount Schottky Barrier Rectifier

Parameter	Value	Unit
$V_{RRM}$	20~200	V
$I_{F(AV)}$	5.0	A



DO-214AA/SMB

#### Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability

#### Applications

- For use in low-voltage, high-frequency inverters, free-wheeling applications, DC/DC converters, and polarity protection circuits.

#### Absolute Maximum Ratings and Characteristics (Ta=25°C unless otherwise noted)


Parameter	Symbol	SS52B	SS54B	SS56B	SS58B	SS510B	SS512B	SS515B	SS520B	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	20	40	60	80	100	120	150	200	V
Maximum RMS voltage	$V_{RMS}$	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	$V_{DC}$	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	5.0								A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	150								A
Max Instantaneous Forward Voltage at 5A	$V_F$	0.55		0.70		0.85		0.90		V
Maximum DC Reverse Current Ta=25°C at Rated DC Reverse Voltage Ta=100°C	$I_R$	0.5 20			0.1 10					mA
Typical Junction Capacitance (1)	$C_j$	500			300					pF
Typical Thermal Resistance (2)	$R_{\theta JA}$	50								°C/W
Operating Junction Temperature Range	$T_j$	-55 ~ +150								°C
Storage Temperature Range	$T_{stg}$	-55 ~ +150								°C

(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C


(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

**Typical characteristics**


**Fig.1 Forward Current Derating Curve**

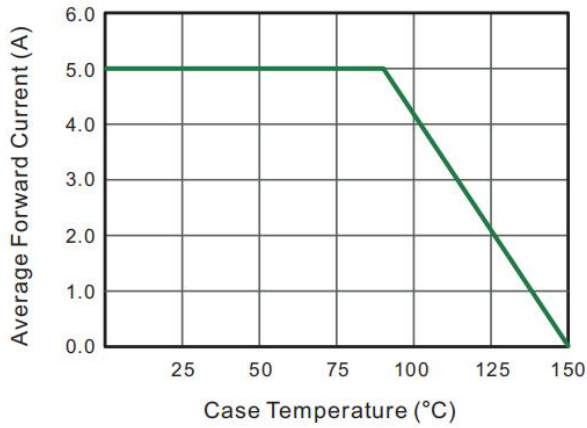


**Fig.2 Typical Reverse Characteristics**

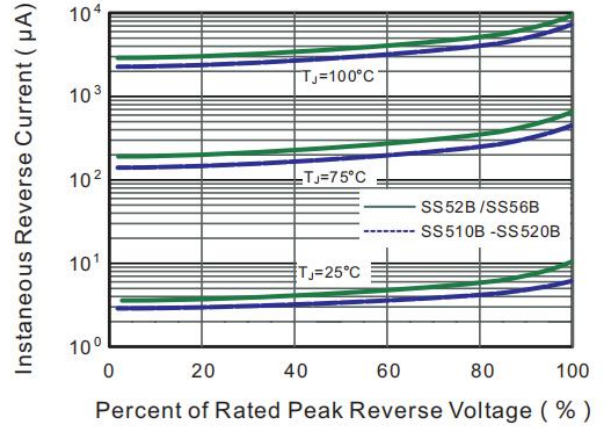


**Fig.3 Typical Forward Characteristic**

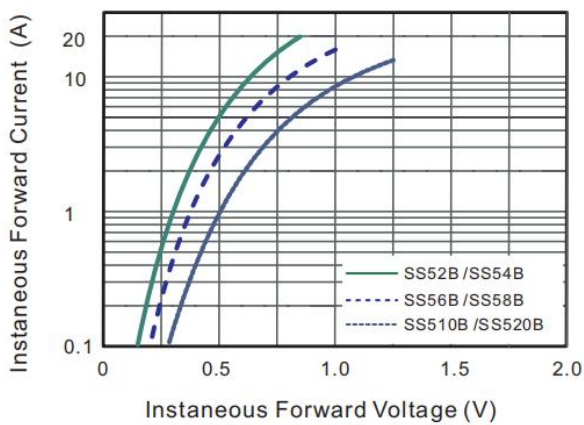


**Fig.4 Typical Junction Capacitance**

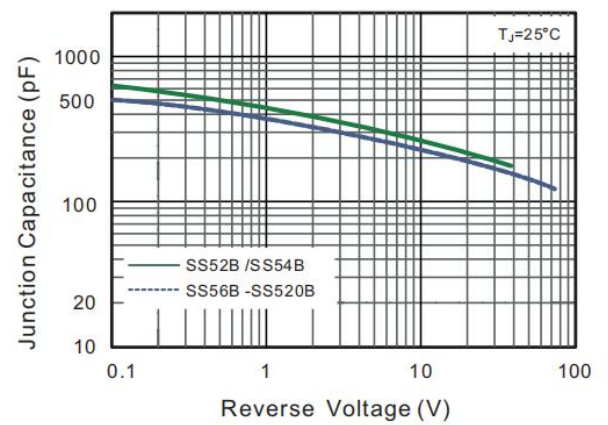

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

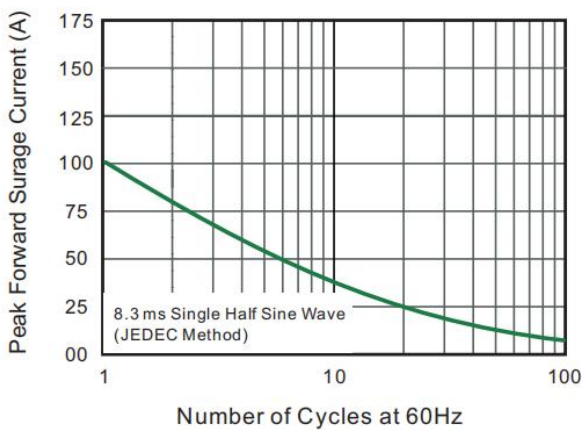


**Fig.6- Typical Transient Thermal Impedance**

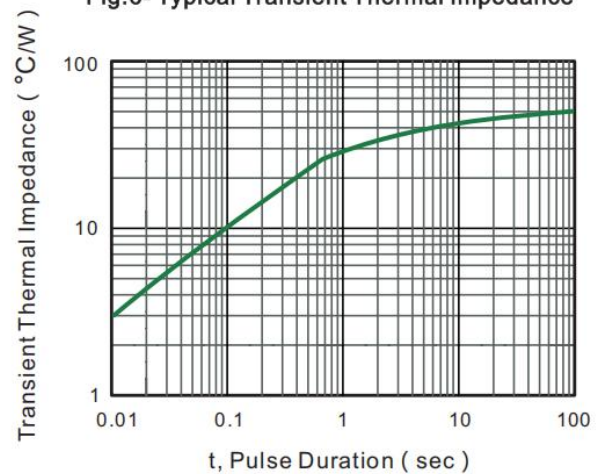

### Package Outlines

Plastic surface mounted package; 2 leads


#### DO-214AA/SMB

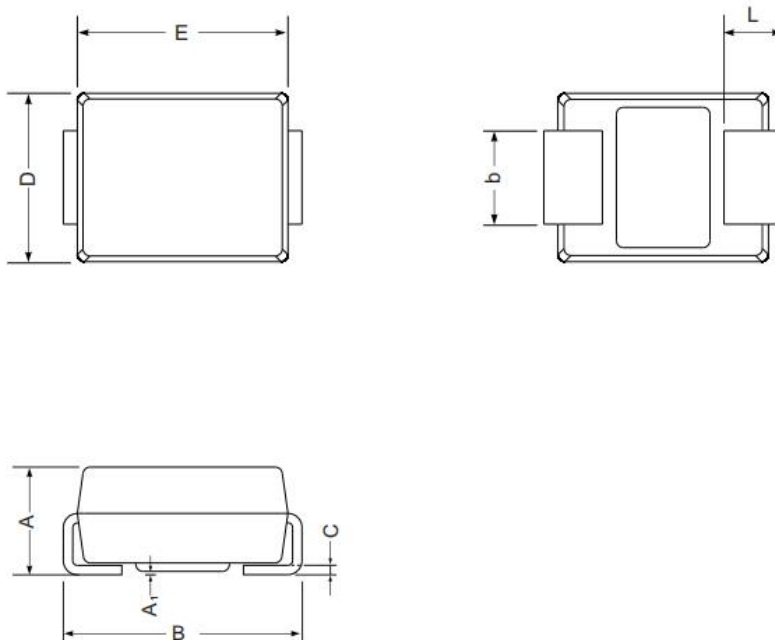

SMB mechanical data

UNIT		A	E	D	B	A <sub>1</sub>	L	C	b
mm	max	2.5	4.70	3.94	5.5	0.20	1.5	0.305	2.2
	min	2.1	4.06	3.3	5.0	0.05	0.8	0.152	1.9
mil	max	98	185	155	216	7.9	59	12	87
	min	82	160	130	196	2.0	32	6	75

### The recommended mounting pad size

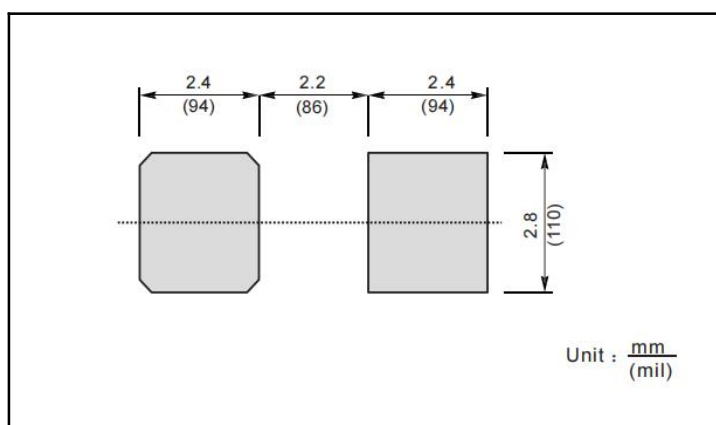

### Marking

Type number	Marking code
SS52B	SS52
SS54B	SS54
SS56B	SS56
SS58B	SS58
SS510B	SS510
SS512B	SS512
SS515B	SS515
SS520B	SS520

**\*Important Usage Information and Disclaimer**

The specifications of Zhuhai Hypersemi Co., Ltd. products are not guarantees of product characteristics. They reflect typical performance expected in standard applications, which may vary with specific uses. Users must conduct prior testing for their applications and make necessary adjustments.

Users are responsible for the safety of applications utilizing our products and must implement adequate safety measures to prevent physical injury, fire, or other risks in case of product failure. It is the user's duty to ensure that application designs comply with all applicable laws and standards. Our products must not be used in any applications where a product failure could reasonably result in personal injury, unless specifically authorized in a signed document by Zhuhai Hypersemi Co., Ltd.

No representations or warranties are made regarding the accuracy or completeness of this information, including any claims of non-infringement of third-party intellectual property rights. Zhuhai Hypersemi Co., Ltd. assumes no liability for any applications or uses of its products and does not grant any licenses to its intellectual property rights or those of others. We also make no claims regarding non-infringement of third-party intellectual property rights that may arise from applications.

Due to technical requirements, our products may contain hazardous substances. For details, please contact your nearest sales office. This document replaces all previous information and may be updated. We reserve the right to make changes.